




EXCESS-3 TO DECIMAL CONVERTER

MODEL DCONV11

This trainer has been designed with a view to provide practical and experimental knowledge of Express-3 to Decimal converter.

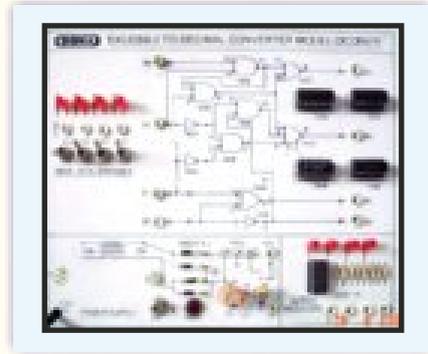

FEATURES

1. All components are soldered on hollow tags of 0.25" diameter height of 0.4" on the front side of PCB
2. The complete circuit diagram is screen printed on component side of the PCB with circuit and parts at the same place.
3. The true value of component is printed on component side.
4. The PCB with components on front side is fitted in elegant wooden box having lock and key arrangement
5. The acrylic cover is fitted on PCB to safeguard parts. It has holes for alignment and repair.
6. The testing points are provided with 1.25" tags to connect CRO probe
7. All Trainers are operated on 230V AC mains and must be self-contained unit.

SPECIFICATIONS

1. Power supply requirement : 230V AC, 50 Hz.
2. Built in IC based regulated Power supply - 0-5 V DC/200 mA.
3. Following parts provided on Single PCB with connecting terminals.
Express-3 to Decimal converter : 1 No.
4. Seven segment output Indicator : 1 No.
5. Digital input data Switches : 4 Nos provided.
6. Standard Accessories :

1. User Manual with practical and circuit diagrams.

In keeping view of SIGMA policy of continuous development and improvement, the Specifications may be changed without prior notice or obligation.

Sigma Trainers
E-103, Jai Ambe Nagar,
Near Udgam School, Thaltej,
AHMEDABAD - 380054.

Phone : 079-26852427 / 26767512
Fax : 079-26840290 / 26759661
ISDN : 079-26859162 / 26853758
Email : sales@sigmatrainers.com
: sigmatrainers@sify.com
Web : www.sigmatrainers.com

Dealer:-