




08. LORAWAN OUTDOOR GATEWAY TRAINER

MODEL- LORAWAN-OUTDOOR100

SPECIFICATIONS

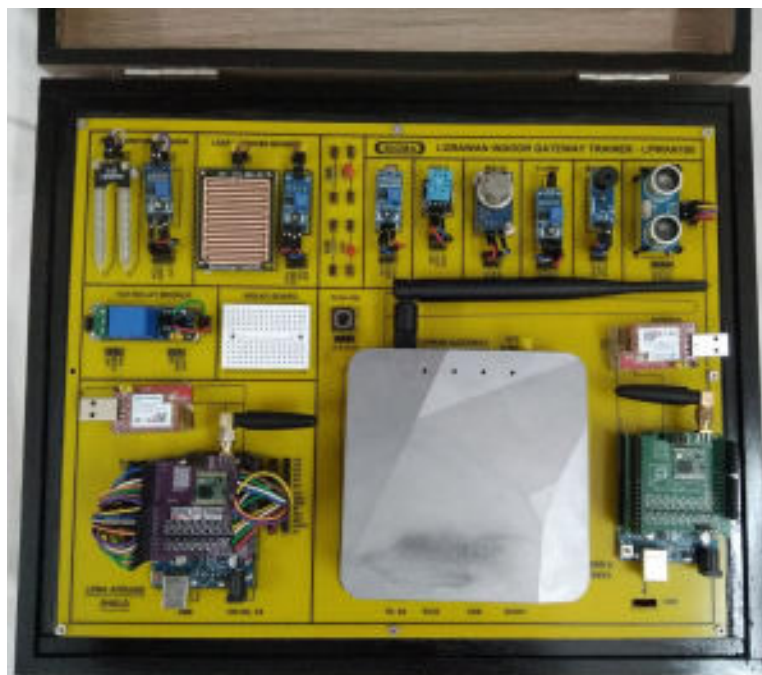

This trainer has been designed with a view to provide practical and experimental knowledge of Internet of Things (IOT) with LoRaWAN Outdoor Gateway Communication Sensors programming with Arduino IOT Boards with LoRaWAN Gateways.

SPECIFICATIONS

A. Main Specs

1. Following Parts and Modules are assembled on Single PCB of size - 18 Inch x 15 Inch.
2. The complete circuit diagram is screen printed on component side of the PCB with circuit and Parts at the same place.
3. The PCB with components on front side is fitted in elegant wooden box having lock and key arrangement.
4. Modules and Parts should be removable without desoldering for easy repair / replacement
5. The acrylic cover is fitted on PCB to safeguard main parts.

B. Micro Controllers

- | | |
|----------------------------------|--------|
| 1. Arduino UNO R3 | : 2 No |
| 2. Lora Arduino Shield | : 2 No |
| 3. 5 dbi LoRa Antenna for 865MHz | : 2 No |
| 4. LoraWAN IOT Gateway | : 2 No |

C. Sensors

- | | |
|------------------------------------|--------|
| 1. Flame Sensor | : 1 No |
| 2. Photosensitive LDR Sensor | : 1 No |
| 3. Temperature and Humidity Sensor | : 1 No |
| 4. Ultrasonic Distance Sensor | : 1 No |

D. Multiple Onboard Embedded Communication Protocols

1. I2C
2. SPI
3. UART

E. Programming Examples

1. Arduino Programming

F. Applications

1. Smart Buildings & Home Automation
2. Logistics and Supply Chain Management
3. Smart Metering
4. Smart Agriculture
5. Smart Cities
6. Smart Factory

G. Features

1. Open Source Embedded Linux System
2. Managed by Web GUI,SSH via LAN or WiFi
3. Support Semtech UDP packet forwarder
4. Cellular Failover connection {optional}
5. Direct Communication to LoRaWAN• ABP Node
6. LoRaWAN Packet Filtering
7. Far seeing LED Indicator
8. Built-in GPS Module for Location & Timing
9. External Fiber glass antenna
10. Auto – Provision
11. Support MQTTS
12. Remote Monitoring
13. 802.3af POE
14. IP65
15. Lighting Protection
16. Power Consumption :12V 300 - 500mA

H. LoRa Gateway – DLOS8N Specifications

1. SX1302	: 1 No - LoRa® Transceiver Module
2. SX1250	: 2 No - LoRa® Transceiver Module
3. Processor	: 400MHz Arm 9331 processor
4. RAM	: 64MB
5. ROM	: 16MB Flash
6. Frequency Band	: IN865 for India – 865 MHz
7. Channels	: 8
8. Ethernet Port	: 10M/100M RJ45
9. Wi-Fi	: 2.4 GHz - 802.11 b/g/n
10. LoRaWAN Wireless	: 1 No
11. USB 2.0 Host Port	: 1 No
12. Mini-PCI E connector	: 1 No
13. RP - SMA Connector for LoRa Antenna	
14. Max Output Power	: 27dBm
15. Applications Coverage	: 1 to 2 Km
16. Speed	: 980bps to 12500 bps
17. Dimension	: 490 x 120 x 190 mm
18. Enclosure Material	: Plastic
19. Enclosure Color	: White
20. Weight	: 2.5kg
21. Power Supply	: 12 - 24 V DC, 2 A

3. WiFi Specs for Gateways:

1. IEEE 802.11 b/g/n
2. Frequency Band: 2.4 ~ 2.462GHz
3. Tx power:
 - 11n tx power : mcs7/15: 11db mcs0 : 17db
 - 11b tx power: 18db
 - 11g 54M tx power: 12db
 - 11g 6M tx power: 18db
4. Wifi Sensitivity
 - 11g 54M : -71dbm
 - 11n 20M : -67dbm

4. LoRa Specs for both above LoRa Gateways:

1. Up to -140 dBm sensitivity
2. 70 dB CW interferer rejection at 1 MHz offset
3. Protocols : Class A / Class B / Class C
4. Able to operate with negative SNR, CCR up to 9dB
5. 8 x 8 channels LoRa packet detectors,
8 x SF5-SF12 LoRa demodulators,
8 x SF5-SF10 LoRa demodulators,
125/250/500 kHz LoRa demodulator
1 x GFSK demodulator
6. Emulates 49 x LoRa demodulators and 1 x (G)FSK demodulator
7. Dual digital TX & RX radio front-end interfaces
8. 10 programmable parallel demodulation paths
9. Dynamic data-rate (DDR) adaptation
10. True antenna diversity or simultaneous dual-band operation

5. Features of LoRaWAN Gateway:

1. Open Source OpenWrt system
2. Managed by Web GUI, SSH via WAN or WiFi
3. Remote access with Reverse-SSH
4. Emulates 49x LoRa demodulators
5. LoRaWAN Gateway
6. 10 programmable parallel demodulation paths
7. Pre-configure to support different LoRaWAN regional settings.
8. Allow to customize LoRaWAN regional parameters.
9. Support Local decode ABP end node info and transfer to MQTT server
10. Support different level log in.

I. Micro Controllers and other parts

- | | |
|------------------------------------|----------|
| 1. LoRa Arduino Shield | : 2 Nos. |
| 2. Arduino UNO Board | : 2 Nos |
| 3. USB Cables | : 2 No |
| 4. Flame Sensor | : 1 No |
| 5. Photosensitive LDR Sensor | : 1 No |
| 6. Temperature and Humidity Sensor | : 1 No |
| 7. Ultrasonic Distance Sensor | : 1 No |
| 8. White LED | : 5 Nos. |
| 9. Audio Buzzer | : 1 No |
| 10. Relay Module | : 1 No |
| 11. Jumper Wires Male to Male | : 20 Nos |
| 12. Jumper Wires Female to Female | : 20 Nos |
| 13. Jumper Wires Female to Male | : 20 Nos |

J. Accessories

- | | |
|---------------------------------|--|
| 1. All Cables and Adaptors | |
| 2. Pen Drive | : 16 GB with All Codes and Soft copy of Manual |
| 3. E-Books for IOT Subject | : 100 Nos. in PDF Format |
| 4. Mp4 Video for IOT Subject | : 100 Nos |
| 5. Online Cloud/Server Services | : For 1 Years on Cloud Server |
| 6. Live Training at College | : For 2 Days for 4 Hours per Day |
| 7. After Sale Training support | : By Online Zoom Meeting or By Whatsapp Video |

EXPERIMENTS

1. To explain theory of All Micro Controller Boards, All Wireless Gateways and All Sensors Parts
2. To measure all Sensors data using Arduino Boards
3. To setup and configure LoRaWAN Cloud Server
4. To send live Sensors Data between two Arduino Lora Shield using Peer-to-Peer Lora Communication
5. To send live Sensors Data between two Lora USB Modules using Peer-to-Peer Lora Communication
6. To send live Sensors Data to LoRaWAN Cloud and View on Website Page Dashboard
7. To send live Sensors Data to LoRaWAN Cloud and View on Android Mobile App
8. To send live Sensors Data to LoRaWAN Cloud and save on MySQL Cloud Server and then store and export it in xls file
9. To send Sensors data to Local Host Server, store and export it in xls file
10. To send Sensors data to Local Host Server and Display on website html page

Contact us

Registered Office

SIGMA TRAINERS AND KITS
E-113, Jai Ambe Nagar,
Near Udgam School,
Drive-in Road,
Thaltej,
AHMEDABAD-380054. INDIA.

Factory

SIGMA TRAINERS AND KITS
B-6, Hindola Complex,
Below Nishan Medical Store,
Lad Society Road,
Near Vastrapur Lake,
AHMEDABAD-380015. INDIA.

Contact Person

Prof. D R Luhar – Director

Mobile : 9824001168

Whatsapp : 9824001168

Phones:

Office : +91-79-26852427

Factory : +91-79-26767512
+91-79-26767648
+91-79-26767649

E-Mails :

sales@sigmatrainers.com

drluhar@gmail.com